

3246E2



ELECTRIC SCISSOR LIFT



www.jlg.com

JLG®

JLG MODEL 3246E2

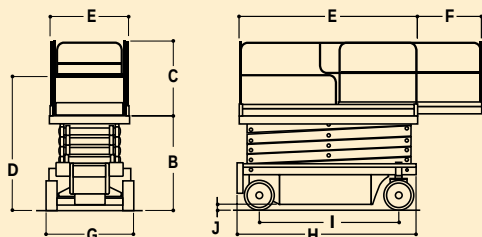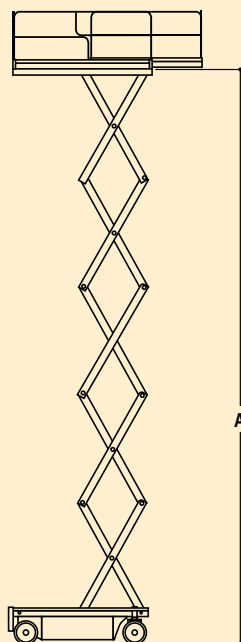

DIMENSIONAL DATA

A. Platform Height - Elevated	32 ft. (9.75 m)
B. Platform Height - Lowered	4 ft. 3 in. (1.30 m)
C. Platform Railing Height*	3 ft. 7.5 in. (1.10 m)
D. Overall Height (Rails Folded)	6 ft. 5 in. (1.96 m)
E. Platform Size	45 x 84 in. (1.14 x 2.13 m)
F. Platform Extension	3 ft. (91 cm)
G. Overall Width	3 ft. 10 in. (1.17 m)
H. Overall Length	7 ft. 6.5 in. (2.30 m)
I. Wheelbase	5 ft. 8.5 in. (1.74 m)
J. Ground Clearance	3.0 in. (7.62 cm)
Platform Capacity	700 lbs (318 kg)
Capacity on Platform Extension	250 lbs (113 kg)
Lift/Lower Time	60/57 sec.
Maximum Drive Height	Full Height
Gross Vehicle Weight**	6,100 lbs. (2,767 kg)

CHASSIS

Drive Speed - Lowered	2.0 mph (3.2 kph)
Drive Speed - Elevated	0.5 mph (0.8 kph)
Gradeability	25%
Turning Radius (Inside)	45 in. (1.14 m)
Turning Radius (Outside)	115 in. (2.92 m)
Tire Size/Type	16 x 5 Non-Marking Solid
Brakes	Automatic Rear Wheel Parking

POWER SOURCE

Batteries	4 x 6V 245 amp-hr
Charger	20 Amp Automatic SCR 120/250V, 50/60HZ
Electric Motor	4.5 hp (3.4 kW)
Pump	Single Section Gear
Hydraulic Reservoir	4 gal. (15.2 L)

*Special heights available, consult factory.

**Certain options or country standards will increase weight.

PERFORMANCE FEATURES

Standard Features

3 ft. Roll-out Deck Extension
 Moveable, Removeable Platform
 Console Box
 Lanyard Attach Points
 Three Speed Joystick Drive Control
 with Thumb Steer
 Positive Traction
 Lubrication Free Scissor
 Arm Bushings
 Scissor Maintenance Prop
 Manual Descent Pull Cable
 Swing-Out Battery and Hydraulic
 Compartment Doors
 Four 6V 245 Amp-Hour Deep
 Cycle Batteries
 20 Amp Automatic SCR
 Battery Charger
 Hourmeter
 Pot-Hole Protection
 Powder-Coated Steel, Nickel Plated
 Pins, Yellow Zinc-Chromate
 Plated Fasteners
 Tie Down Lugs
 Fork Lift Pockets
 2 Degree Slope Alarm & Light
 Descent Alarm
 Solid Non-Marking Tires

Available Options

110V-AC Receptacle
 Battery Condition Indicator
 Spring-Loaded 1/2 Gate¹
 Drywall Gate
 Horn
 800W-AC Generator²
 Pressure Check Port
 All Motion Alarm
 Flashing Amber Beacon

1. Includes drywall gate.

2. Includes 110V outlet.

The JLG "1 & 5" Warranty

JLG Industries, Inc. backs our products with our exclusive "1 & 5" Warranty. We provide coverage on all products for one (1) full year, and cover all specified major structural components for five (5) full years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable OSHA Regulations in 29 CFR 1910.67, 29 CFR 1926.453, and ANSI A92.6-1999 as originally manufactured for intended applications.

JLG Industries, Inc.

1 JLG Drive
 McConnellsburg, PA 17233-9553
 Telephone 717-485-5161
 Toll-free in US 877-JLG-LIFT
 Fax 717-485-6417
www.jlg.com

Printed in USA
 FORM NO.: SS-3246E2-1298-10M
 PART NO.: 3131305
 R01012

